

# Sensor SB-59


## DESCRIPTION:

Temperature sensor with silicone cable and covered for a stainless steel shell. It operates in temperatures that range from  $-50^{\circ}\text{C}$  to  $200^{\circ}\text{C}$  ( $-58^{\circ}\text{F}$  to  $392^{\circ}\text{F}$ ).

## COMPATIBLE INSTRUMENTS:

- TC-900 E Power (3rd Sensor)
- TC-900 E Log (3rd Sensor)
- MT-512 E 2HP
- MT-512 E Log
- MT-543 E Plus
- MT-543 E Log
- MT-516 E
- MT-519 E
- TIC-17 RGTi
- TI-44 E plus
- Anasol
- Microsol E
- Microsol Advanced Line
- Microsol E II plus
- Microsol II power
- RT-607E plus

## DIMENSIONS\*:

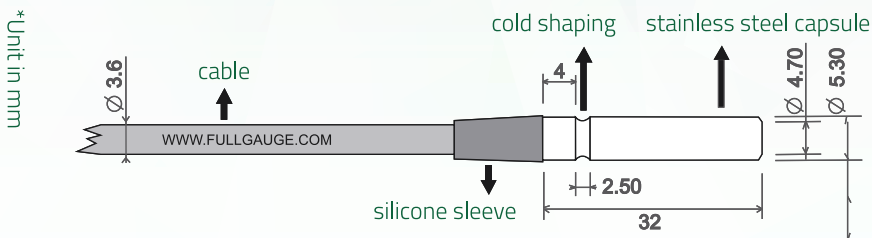

**CABLE COLOR:**  
White

**CAPSULE TYPE:**  
Stainless steel

## MORE INFORMATIONS:

- **NTC:** Resistance of 10K Ohms at  $77^{\circ}\text{F}$
- **Temperature range:**  $-50^{\circ}\text{C}$  to  $200^{\circ}\text{C}$  ( $-58^{\circ}\text{F}$  to  $392^{\circ}\text{F}$ )
- **Precision:** 1% F.E.M.
- **Response time:** Less than 10 seconds. Test in water according to IEC 751. Time to reach 63.2% of the temperature step.
- **Tensile test:**  $P_{\text{max}} = 4\text{kgf}$

## FULL GAUGE'S TIP

The accessories that will simplify your installation.



CONTACT OUR SALES TEAM FOR MORE INFORMATION.



[www.fullgauge.com](http://www.fullgauge.com)  
[comex@fullgauge.com](mailto:comex@fullgauge.com)